



# IS-II active Fixture(S.L.A. Surface)




## • Narrow / Diameter Ø 3.5



Length(mm)	8.5	10.0	11.5	13.0
Product name	BIS3508A	BIS3510A	BIS3511A	BIS3513A

※ Cover Screw Included




## • Regular / Diameter Ø 4.0



Length(mm)	7.3	8.5	10.0	11.5	13.0
Product name	BIS4007A	BIS4008A	BIS4010A	BIS4011A	BIS4013A

※ Cover Screw Included




## • Regular / Diameter Ø 4.5



Length(mm)	7.3	8.5	10.0	11.5	13.0
Product name	BIS4507A	BIS4508A	BIS4510A	BIS4511A	BIS4513A

※ Cover Screw Included




## • Wide / Diameter Ø 5.0



Length(mm)	7.3	7.3	7.3	8.5	10.0	11.5	13.0
Product name	BIS5005A	BIS5006A	BIS5007A	BIS5008A	BIS5010A	BIS5011A	BIS5013A

※ Cover Screw Included

# IS-II active S-Wide Fixture(S.L.A. Surface)




## • S-Wide / Diameter Ø 5.5



Length(mm)	7.3	7.3	7.3	8.5	10.0	11.5	13.0
Product name	BIS5505A	BIS5506A	BIS5507A	BIS5508A	BIS5510A	BIS5511A	BIS5513A

※ Cover Screw Included




## • S-Wide / Diameter Ø 6.0



Length(mm)	7.3	8.5	10.0	11.5	13.0
Product name	BIS6007A	BIS6008A	BIS6010A	BIS6011A	BIS6013A

※ Cover Screw Included



## • S-Wide / Diameter Ø 7.0



Length(mm)	7.3	8.5	10.0	11.5	13.0
Product name	BIS7007A	BIS7008A	BIS7010A	BIS7011A	BIS7013A

※ Cover Screw Included

※ Requires S-Wide surgery kit for diameter Ø5.5 ~ Ø7.0 fixture

## Cover Screw

Narrow / All 7.3mm Fixtures




ISN300

Regular / Wide / S-Wide



ISC400

## IS-II Fixture (R.B.M. Surface)




### • Narrow / Diameter Ø 3.5



Length(mm)	8.5	10.0	11.5	13.0
Product name	BIS3508	BIS3510	BIS3511	BIS3513

※ Cover Screw Included




### • Regular / Diameter Ø 4.0



Length(mm)	7.3	8.5	10.0	11.5	13.0
Product name	BIS4007	BIS4008	BIS4010	BIS4011	BIS4013

※ Cover Screw Included




### • Regular / Diameter Ø 4.5



Length(mm)	7.3	8.5	10.0	11.5	13.0
Product name	BIS4507	BIS4508	BIS4510	BIS4511	BIS4513

※ Cover Screw Included




### • Wide / Diameter Ø 5.0



Length(mm)	7.3	8.5	10.0	11.5	13.0
Product name	BIS5007	BIS5008	BIS5010	BIS5011	BIS5013

※ Cover Screw Included

# IS-II S-Wide Fixture (R.B.M. Surface)




## • S-Wide / Diameter Ø 5.5



Length(mm)	7.3	8.5	10.0	11.5	13.0
Product name	BIS5507	BIS5508	BIS5510	BIS5511	BIS5513

※ Cover Screw Included




## • S-Wide / Diameter Ø 6.0



Length(mm)	7.3	8.5	10.0	11.5	13.0
Product name	BIS6007	BIS6008	BIS6010	BIS6011	BIS6013

※ Cover Screw Included



## • S-Wide / Diameter Ø 7.0



Length(mm)	7.3	8.5	10.0	11.5	13.0
Product name	BIS7007	BIS7008	BIS7010	BIS7011	BIS7013

※ Cover Screw Included

※ Requires S-Wide surgery kit for diameter Ø5.5 ~ Ø7.0 fixture

## Cover Screw

Narrow / All 7.3mm Fixtures



ISN300


Regular / Wide / S-Wide




ISC400



# IS Fixture (R.B.M. Surface)




## • Narrow / Diameter Ø 3.5



Length(mm)	8.5	10.0	11.5	13.0
Product name	IS308	IS310	IS311	IS313

※ Cover Screw Included




## • Regular / Diameter Ø 4.0



Length(mm)	7.3	8.5	10.0	11.5	13.0
Product name	IS407	IS408	IS410	IS411	IS413

※ Cover Screw Included




## • Regular / Diameter Ø 4.5



Length(mm)	7.3	8.5	10.0	11.5	13.0
Product name	IS4507	IS4508	IS4510	IS4511	IS4513

※ Cover Screw Included




## • Wide / Diameter Ø 4.8



Length(mm)	7.3	8.5	10.0	11.5	13.0
Product name	IS507	IS508	IS510	IS511	IS513

※ Cover Screw Included

# IS S-Wide Fixture (R.B.M. Surface)




## • S-Wide / Diameter Ø 5.5



Length(mm)	7.3	8.5	10.0	11.5	13.0
Product name	IS5507	IS5508	IS5510	IS5511	IS5513

※ Cover Screw Included




## • S-Wide / Diameter Ø 6.0



Length(mm)	7.3	8.5	10.0	11.5	13.0
Product name	IS607	IS608	IS610	IS611	IS613

※ Cover Screw Included



## • S-Wide / Diameter Ø 7.0



Length(mm)	7.3	8.5	10.0	11.5	13.0
Product name	IS707	IS708	IS710	IS711	IS713

※ Cover Screw Included

※ Requires S-Wide surgery kit for diameter Ø5.5 ~ Ø7.0 fixture

## Cover Screw

Narrow / All 7.3mm Fixtures



ISN300

Regular / Wide / S-Wide





ISC400

# Healing Abutment

Temporary restorations for contouring of the soft tissue


- Tightening torque : 8~10 Ncm

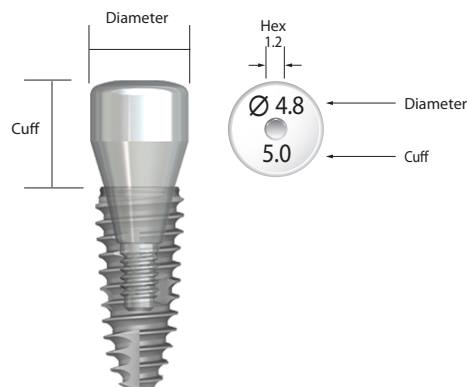

## • Diameter Ø 4.0




Cuff(mm)	2.0	3.0	4.0	5.0	6.0
Product name	ISUH4002	ISUH4003	ISUH4004	ISUH4005	ISUH4006



## • Diameter Ø 4.5




Cuff(mm)	2.0	3.0	4.0	5.0	6.0
Product name	ISUH4502	ISUH4503	ISUH4504	ISUH4505	ISUH4506



## • Diameter Ø 4.8



Cuff(mm)	2.0	3.0	4.0	5.0	6.0	7.0
Product name	ISH402	ISH403	ISH404	ISH405	ISH406	ISH407



## • Diameter Ø 5.5





Cuff(mm)	2.0	3.0	4.0	5.0	6.0	7.0
Product name	ISH502	ISH503	ISH504	ISH505	ISH506	ISH507

# Healing Abutment

Temporary restorations for contouring of the soft tissue


- Tightening torque : 8~10 Ncm

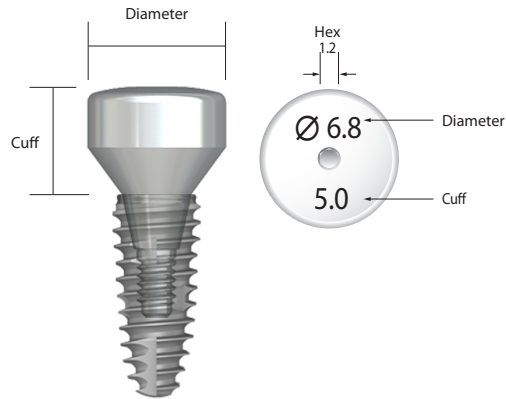

## • Diameter Ø 6.0




Cuff(mm)	2.0	3.0	4.0	5.0	6.0	7.0
Product name	ISH602	ISH603	ISH604	ISH605	ISH606	ISH607



## • Diameter Ø 6.8




Cuff(mm)	2.0	3.0	4.0	5.0	6.0	7.0
Product name	ISH702	ISH703	ISH704	ISH705	ISH706	ISH707



## • Diameter Ø 8.0



Cuff(mm)	2.0	3.0	4.0	5.0	6.0	7.0
Product name	ISH802	ISH803	ISH804	ISH805	ISH806	ISH807



## • Diameter Ø 9.0





Cuff(mm)	2.0	3.0	4.0	5.0	6.0	7.0
Product name	ISH902	ISH903	ISH904	ISH905	ISH906	ISH907

※ Ø 8.0, Ø 9.0 Healing Abutments are for Custom Abutment


# Temporary Abutment

Customizable titanium abutment for temporary crown and bridges


- Abutment Screw(ISC20) included, Tightening torque : 25 Ncm

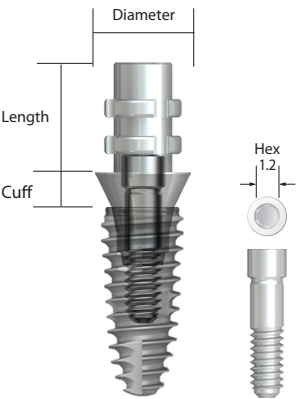


Hex




Length(mm)	6.0	8.0
Product name	ISAHT560	ISAHT580



SCRP® Multi



Length(mm)	6.0	8.0
Product name	ISAST560	ISAST580




Non-Hex



Length(mm)	6.0	8.0
Product name	ISANT560	ISANT580

# Prosthetic Flow Chart


- IS Excellent Solid Abutment

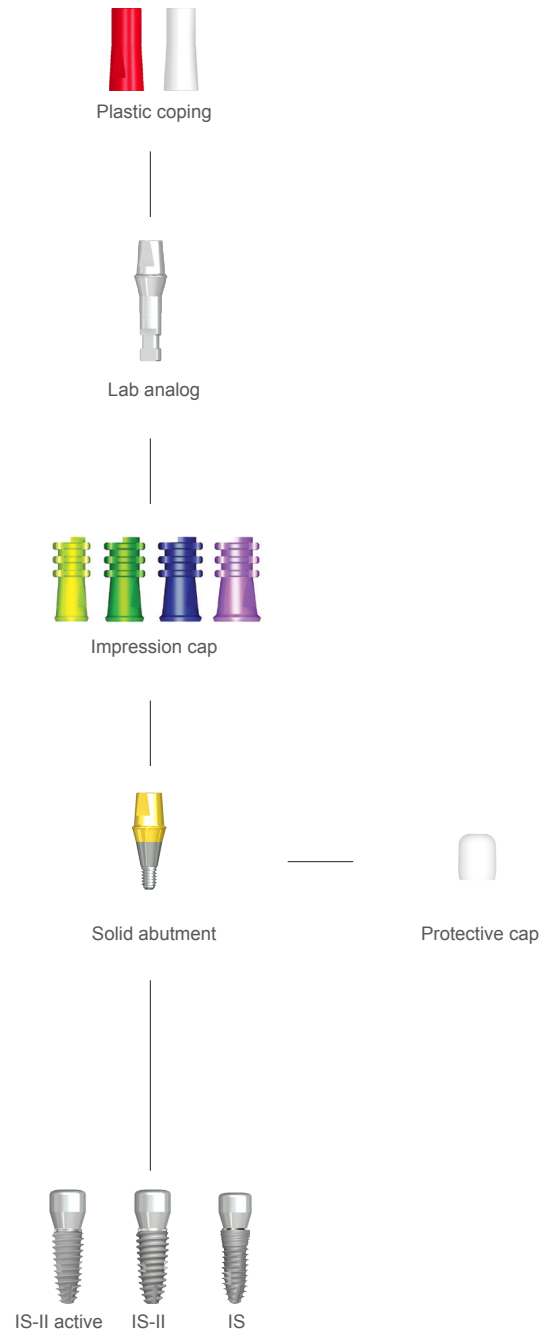

*Note.* When abutments are connected to Narrow Fixture(Ø3.5) or Short Fixture(7.3mm), the total height of abutment is 0.4mm higher than Regular-Wide cases.

# Prosthetic Flow Chart


- IS Cemented Abutment

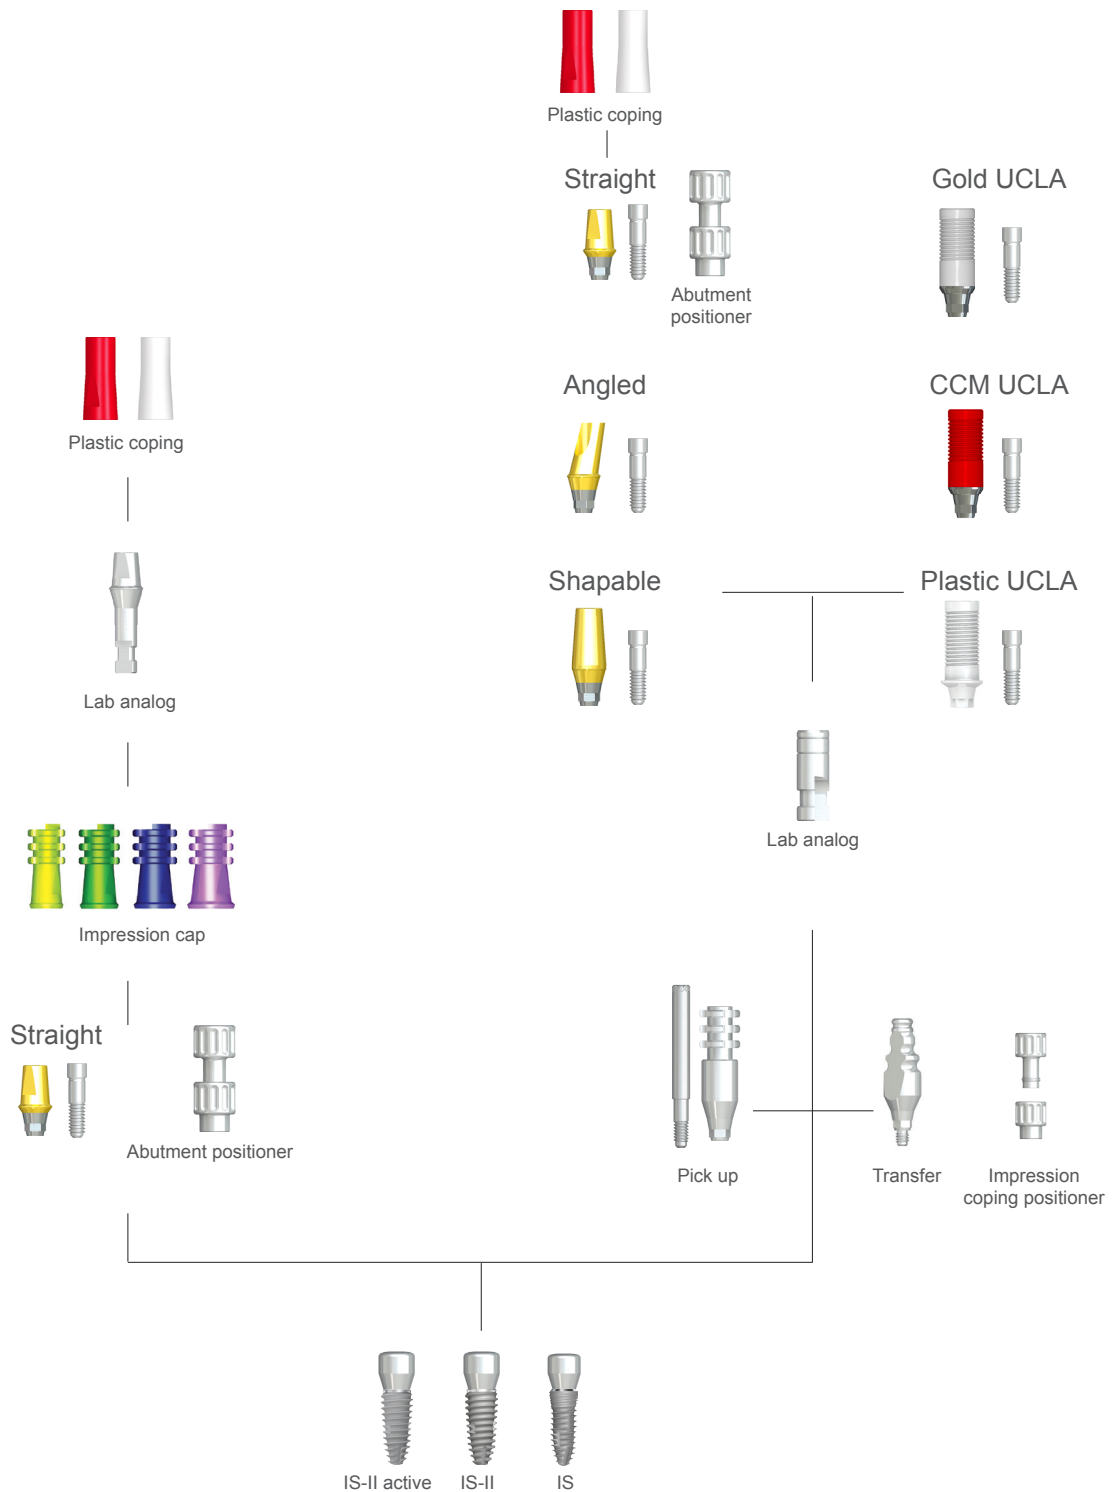

**Note.** When abutments are connected to Narrow Fixture (Ø3.5) or Short Fixture (7.3mm), the total height of abutment is 0.4mm higher than Regular-Wide cases.

# Prosthetic Flow Chart

## - IS Multi Unit Abutment

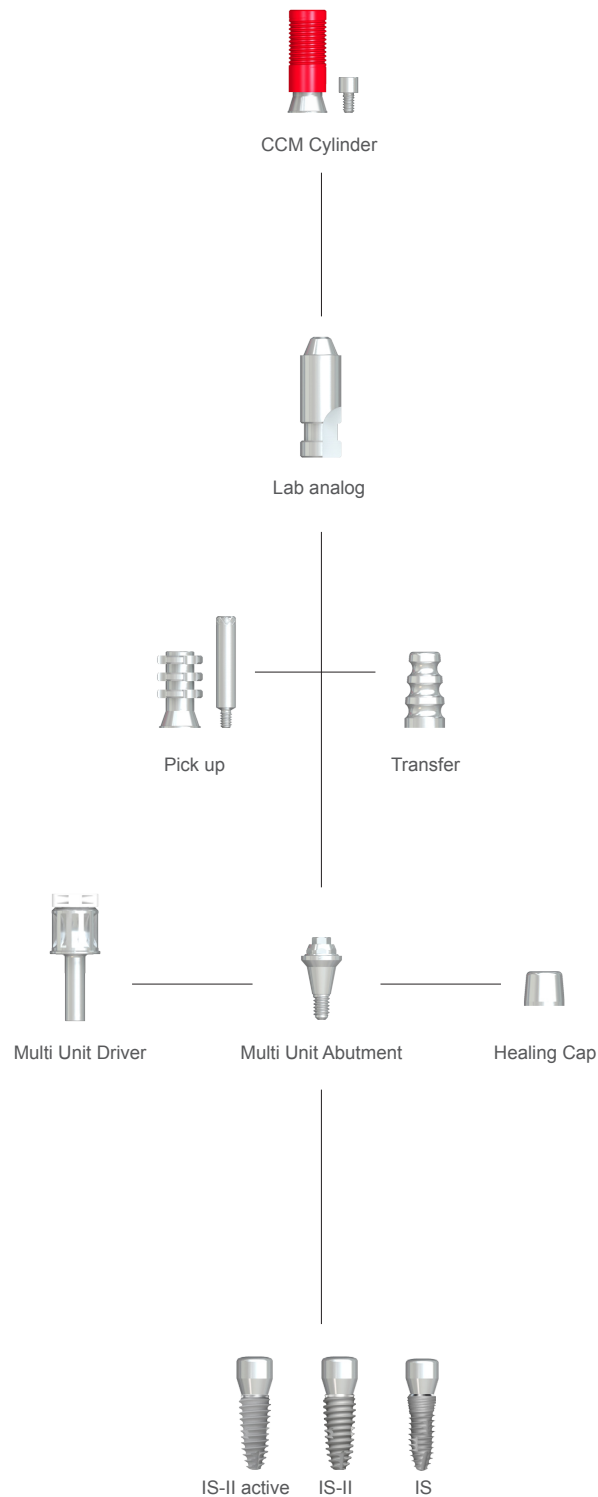


**Note.** When abutments are connected to Narrow Fixture(Ø3.5) or Short Fixture(7.3mm), the total height of abutment is 0.4mm higher than Regular-Wide cases.



# Prosthetic Flow Chart

## - IS Ball Abutment

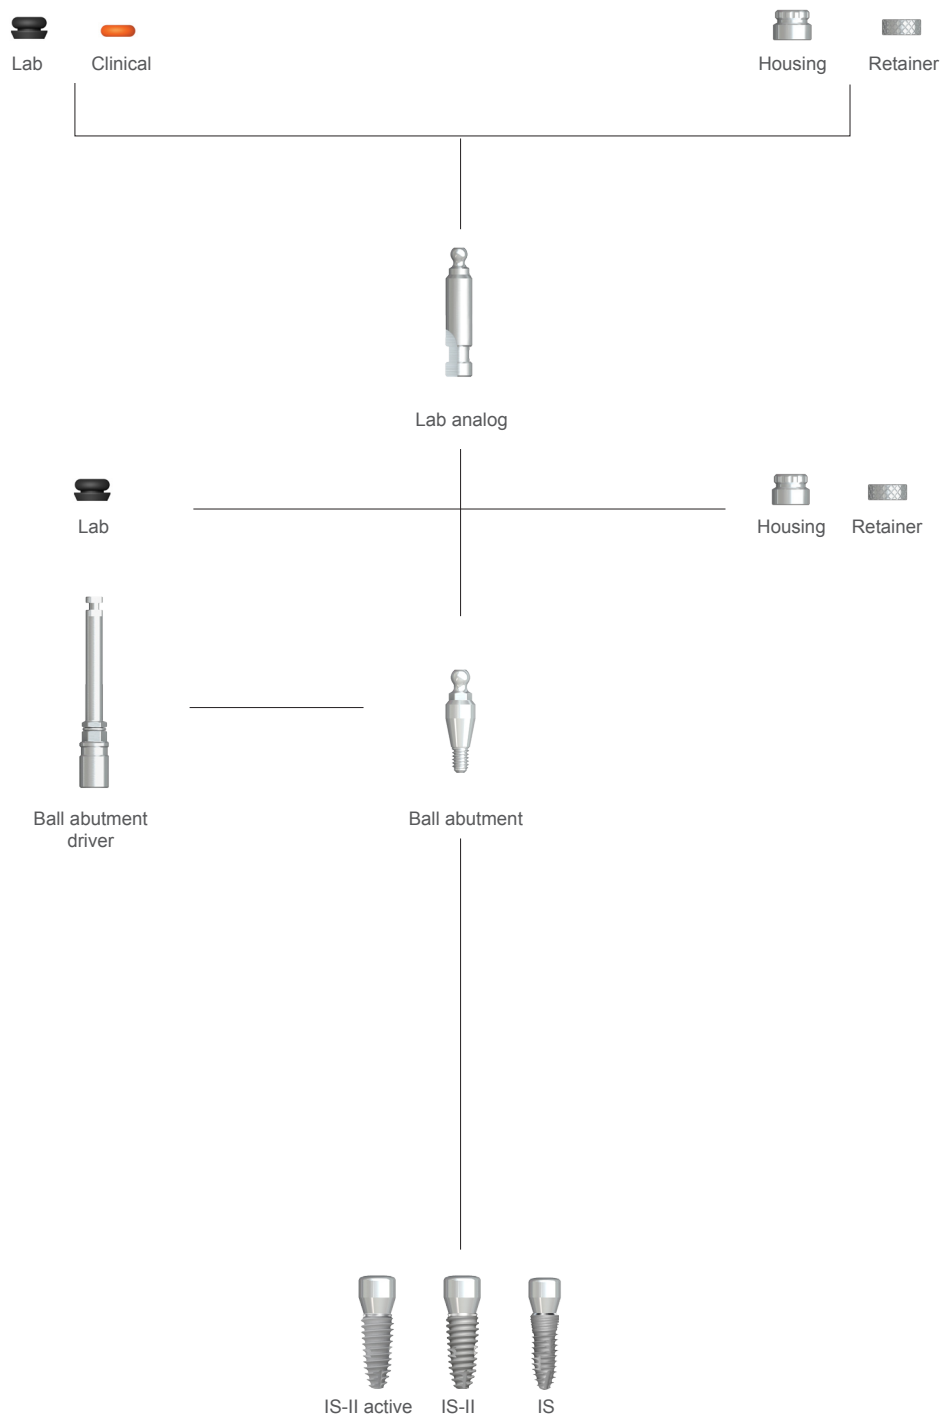


*Note.* When abutments are connected to Narrow Fixture(Ø3.5) or Short Fixture(7.3mm), the total height of abutment is 0.4mm higher than Regular-Wide cases.


# Excellent Solid Abutment

One piece abutment for cemented restorations

- Abutment Tightening Torque : 30 Ncm, Protective Cap Included

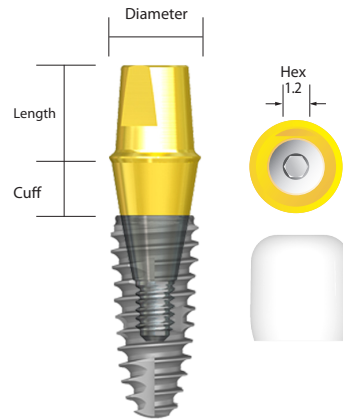


## • Diameter Ø 4.5




Cuff(mm)		1.0	2.0	3.0	4.0	5.0	6.0	7.0
Length	4.5mm	ISAE414	ISAE424	ISAE434	ISAE444	ISAE454	ISAE464	ISAE474
	5.5mm	ISAE415	ISAE425	ISAE435	ISAE445	ISAE455	ISAE465	ISAE475
	7.0mm	ISAE417	ISAE427	ISAE437	ISAE447	ISAE457	ISAE467	ISAE477

## • Diameter Ø 5.2




Cuff(mm)		1.0	2.0	3.0	4.0	5.0	6.0	7.0
Length	4.5mm	ISAE514	ISAE524	ISAE534	ISAE544	ISAE554	ISAE564	ISAE574
	5.5mm	ISAE515	ISAE525	ISAE535	ISAE545	ISAE555	ISAE565	ISAE575
	7.0mm	ISAE517	ISAE527	ISAE537	ISAE547	ISAE557	ISAE567	ISAE577

## • Diameter Ø 5.7



Cuff(mm)		1.0	2.0	3.0	4.0	5.0	6.0	7.0
Length	4.5mm	ISAE614	ISAE624	ISAE634	ISAE644	ISAE654	ISAE664	ISAE674
	5.5mm	ISAE615	ISAE625	ISAE635	ISAE645	ISAE655	ISAE665	ISAE675
	7.0mm	ISAE617	ISAE627	ISAE637	ISAE647	ISAE657	ISAE667	ISAE677

## • Diameter Ø 6.5




Cuff(mm)		1.0	2.0	3.0	4.0	5.0	6.0	7.0
Length	4.5mm	ISAE714	ISAE724	ISAE734	ISAE744	ISAE754	ISAE764	ISAE774
	5.5mm	ISAE715	ISAE725	ISAE735	ISAE745	ISAE755	ISAE765	ISAE775
	7.0mm	ISAE717	ISAE727	ISAE737	ISAE747	ISAE757	ISAE767	ISAE777


# Hex Abutment



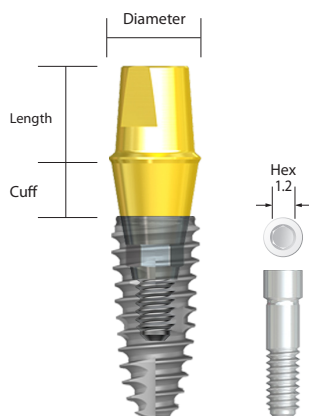

Cementable or Screw-retained abutment for single tooth and bridges

- Customizable by grinding (need to remain at least 3mm of abutment length above fixture platform)
- Abutment Screw (ISCS20) included, Tightening Torque : 30 Ncm








## • Diameter Ø 4.5




					
Cuff(mm)		1.0	2.0	3.0	4.0
Length	4.5mm	ISAH414	ISAH424	ISAH434	ISAH444
	5.5mm	ISAH415	ISAH425	ISAH435	ISAH445
	7.0mm	ISAH417	ISAH427	ISAH437	ISAH447





## • Diameter Ø 5.2




					
Cuff(mm)		1.0	2.0	3.0	4.0
Length	4.5mm	ISAH514	ISAH524	ISAH534	ISAH544
	5.5mm	ISAH515	ISAH525	ISAH535	ISAH545
	7.0mm	ISAH517	ISAH527	ISAH537	ISAH547

## • Diameter Ø 5.7



					
Cuff(mm)		1.0	2.0	3.0	4.0
Length	4.5mm	ISAH614	ISAH624	ISAH634	ISAH644
	5.5mm	ISAH615	ISAH625	ISAH635	ISAH645
	7.0mm	ISAH617	ISAH627	ISAH637	ISAH647

## • Diameter Ø 6.5




					
Cuff(mm)		1.0	2.0	3.0	4.0
Length	4.5mm	ISAH714	ISAH724	ISAH734	ISAH744
	5.5mm	ISAH715	ISAH725	ISAH735	ISAH745
	7.0mm	ISAH717	ISAH727	ISAH737	ISAH747


# SCRP® Multi Abutment



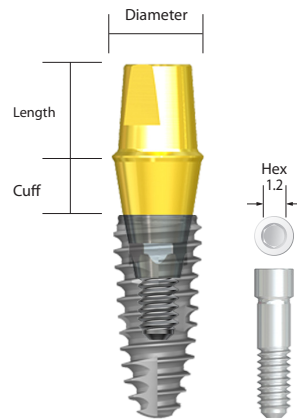

Abutment for screw-cement retained prosthesis

- Short hex design, Retrievable within 20° between implants
- Customizable by grinding (need to remain at least 3mm of abutment length above fixture platform)
- Abutment Screw (ISCS20) included, Tightening Torque : 30 Ncm








## • Diameter Ø 4.5




					
Cuff(mm)		1.0	2.0	3.0	4.0
Length	4.5mm	ISAS414	ISAS424	ISAS434	ISAS444
	5.5mm	ISAS415	ISAS425	ISAS435	ISAS445
	7.0mm	ISAS417	ISAS427	ISAS437	ISAS447





## • Diameter Ø 5.2




					
Cuff(mm)		1.0	2.0	3.0	4.0
Length	4.5mm	ISAS514	ISAS524	ISAS534	ISAS544
	5.5mm	ISAS515	ISAS525	ISAS535	ISAS545
	7.0mm	ISAS517	ISAS527	ISAS537	ISAS547

## • Diameter Ø 5.7



					
Cuff(mm)		1.0	2.0	3.0	4.0
Length	4.5mm	ISAS614	ISAS624	ISAS634	ISAS644
	5.5mm	ISAS615	ISAS625	ISAS635	ISAS645
	7.0mm	ISAS617	ISAS627	ISAS637	ISAS647

## • Diameter Ø 6.5




					
Cuff(mm)		1.0	2.0	3.0	4.0
Length	4.5mm	ISAS714	ISAS724	ISAS734	ISAS744
	5.5mm	ISAS715	ISAS725	ISAS735	ISAS745
	7.0mm	ISAS717	ISAS727	ISAS737	ISAS747


# Non-Hex Abutment



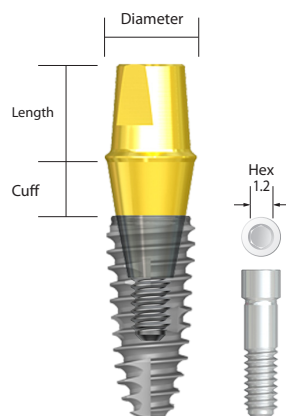

Cementable or Screw-retained abutment for multiple or bridges

- Customizable by grinding (need to remain at least 3mm of abutment length above fixture platform)
- Abutment Screw (ISCS20) included, Tightening Torque : 30 Ncm








## • Diameter Ø 4.5




					
Cuff(mm)		1.0	2.0	3.0	4.0
Length	4.5mm	ISAN414	ISAN424	ISAN434	ISAN444
	5.5mm	ISAN415	ISAN425	ISAN435	ISAN445
	7.0mm	ISAN417	ISAN427	ISAN437	ISAN447





## • Diameter Ø 5.2




					
Cuff(mm)		1.0	2.0	3.0	4.0
Length	4.5mm	ISAN514	ISAN524	ISAN534	ISAN544
	5.5mm	ISAN515	ISAN525	ISAN535	ISAN545
	7.0mm	ISAN517	ISAN527	ISAN537	ISAN547





## • Diameter Ø 5.7



					
Cuff(mm)		1.0	2.0	3.0	4.0
Length	4.5mm	ISAN614	ISAN624	ISAN634	ISAN644
	5.5mm	ISAN615	ISAN625	ISAN635	ISAN645
	7.0mm	ISAN617	ISAN627	ISAN637	ISAN647

## • Diameter Ø 6.5




					
Cuff(mm)		1.0	2.0	3.0	4.0
Length	4.5mm	ISAN714	ISAN724	ISAN734	ISAN744
	5.5mm	ISAN715	ISAN725	ISAN735	ISAN745
	7.0mm	ISAN717	ISAN727	ISAN737	ISAN747

# Angled Abutment(15°)


Customizable by grinding. Can be positioned in 12 directions by selecting A or B type

- Abutment Screw(ISC20) included, Tightening Torque : 30 Ncm

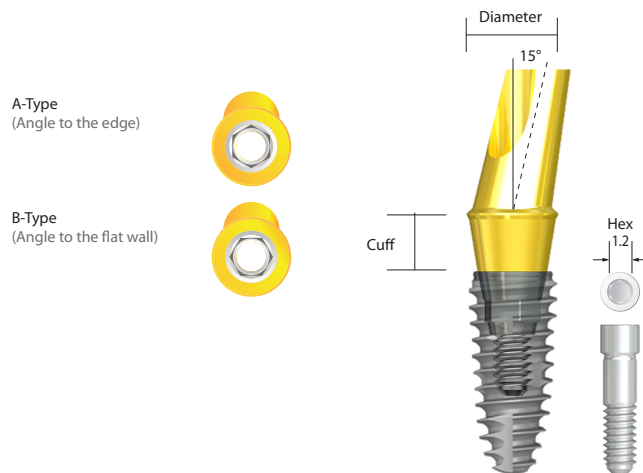


## • Diameter $\varnothing 4.5$


A-Type  
(Angle to the edge)



B-Type  
(Angle to the flat wall)




Non-hex




Cuff(mm)	2.0	3.0	4.0
A Type	ISAHA1427	ISAHA1437	ISAHA1447
B Type	ISAHB1427	ISAHB1437	ISAHB1447
Non-hex	ISANA1427	ISANA1437	ISANA1447

## • Diameter $\varnothing 5.2$


A-Type  
(Angle to the edge)



B-Type  
(Angle to the flat wall)




Non-hex




Cuff(mm)	2.0	3.0	4.0
A Type	ISAHA1527	ISAHA1537	ISAHA1547
B Type	ISAHB1527	ISAHB1537	ISAHB1547
Non-hex	ISANA1527	ISANA1537	ISANA1547

## • Diameter $\varnothing 5.7$


A-Type  
(Angle to the edge)



B-Type  
(Angle to the flat wall)



Non-hex




Cuff(mm)	2.0	3.0	4.0
A Type	ISAHA1627	ISAHA1637	ISAHA1647
B Type	ISAHB1627	ISAHB1637	ISAHB1647
Non-hex	ISANA1627	ISANA1637	ISANA1647

# Angled Abutment(25°)


Customizable by grinding. Can be positioned in 12 directions by selecting A or B type

- Abutment Screw(ISC20) included, Tightening Torque : 30 Ncm

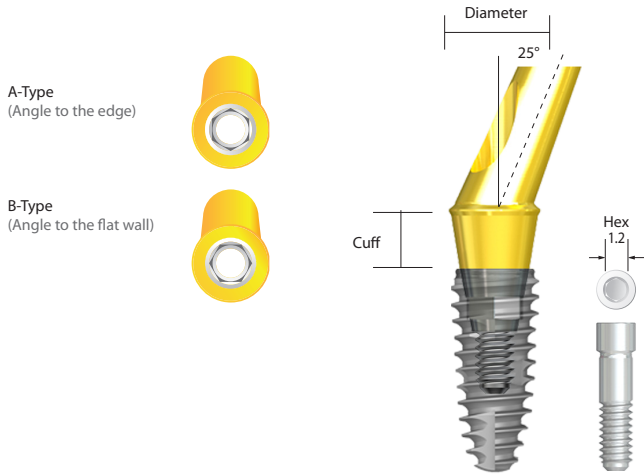


• Diameter  $\varnothing 4.5$


A-Type  
(Angle to the edge)



B-Type  
(Angle to the flat wall)




Non-hex




Cuff(mm)			
	2.0	3.0	4.0
A Type	ISAHA2427	ISAHA2437	ISAHA2447
B Type	ISAHB2427	ISAHB2437	ISAHB2447
Non-hex	ISANA2427	ISANA2437	ISANA2447

• Diameter  $\varnothing 5.2$


A-Type  
(Angle to the edge)



B-Type  
(Angle to the flat wall)



Non-hex




Cuff(mm)			
	2.0	3.0	4.0
A Type	ISAHA2527	ISAHA2537	ISAHA2547
B Type	ISAHB2527	ISAHB2537	ISAHB2547
Non-hex	ISANA2527	ISANA2537	ISANA2547


# Shapable Abutment



Customizable by grinding (need to remain at least 3mm of abutment length above fixture platform)

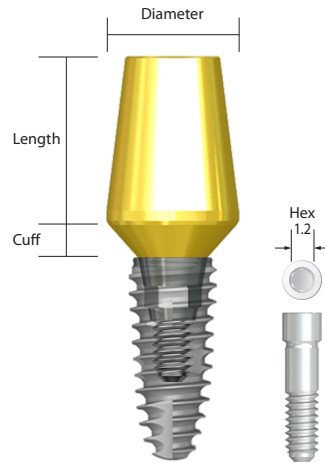- Abutment Screw (ISCS20) included, Tightening Torque : 30 Ncm




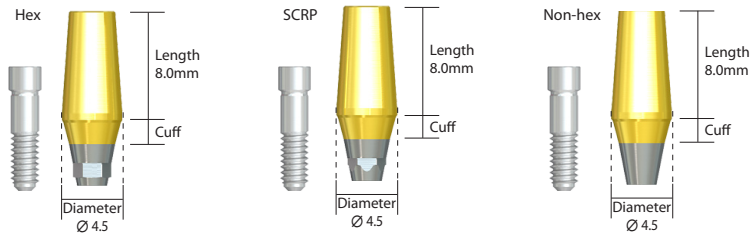

## • Diameter $\varnothing 4.5$




		
Cuff(mm)	2.0	4.0
Hex	ISSH428	ISSH448
SCRP	ISSS428	ISSS448
Non-hex	ISSN428	ISSN448

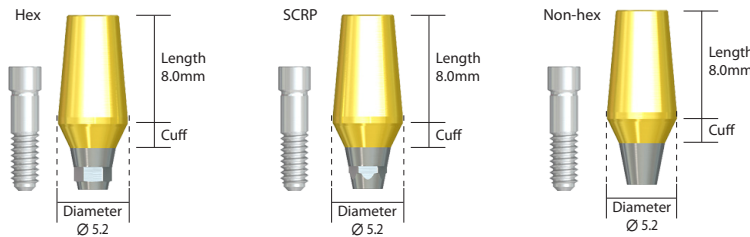

## • Diameter $\varnothing 5.2$




		
Cuff(mm)	2.0	4.0
Hex	ISSH528	ISSH548
SCRP	ISSS528	ISSS548
Non-hex	ISSN528	ISSN548

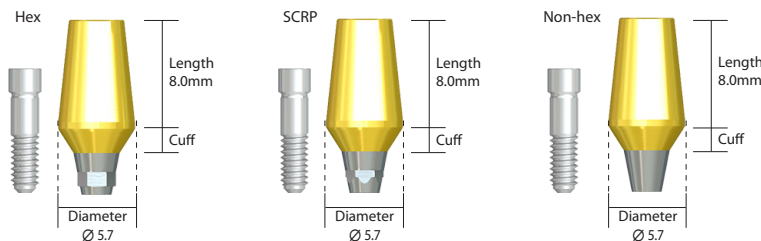

## • Diameter $\varnothing 5.7$



		
Cuff(mm)	2.0	4.0
Hex	ISSH628	ISSH648
SCRP	ISSS628	ISSS648
Non-hex	ISSN628	ISSN648
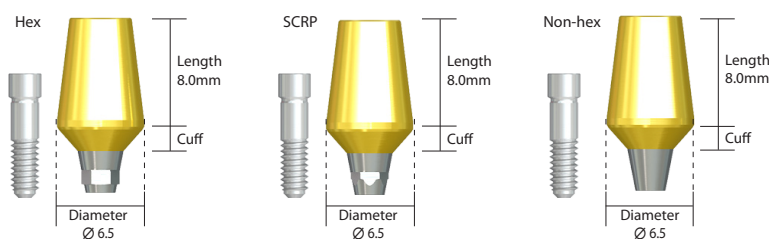
## • Diameter $\varnothing 6.5$




		
Cuff(mm)	2.0	4.0
Hex	ISSH728	ISSH748
SCRP	ISSS728	ISSS748
Non-hex	ISSN728	ISSN748



# UCLA Abutment(Gold / CCM)

Customizable by casting. Cementable or Screw-retained abutment for single tooth and bridges.

- Abutment Screw(ISCS20) included, Tightening Torque : 30 Ncm

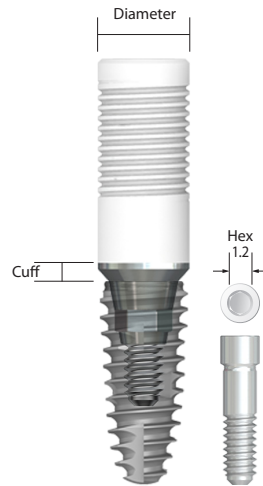

## • Gold / Diameter $\varnothing 4.5$



Hex	SCRP	Non-hex
ISUGH400	ISUGS400	ISUGN400

## • CCM / Diameter $\varnothing 4.5$




Hex	SCRP	Non-hex
ISUCH400	ISUCS400	ISUCN400


# UCLA Abutment(Plastic)

Customizable plastic abutment for temporary crown and bridges

- Abutment Screw(ISCS20) included, Tightening torque : 30 Ncm

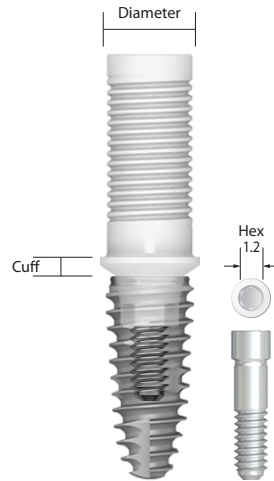


## • Plastic / Diameter $\varnothing 4.5$

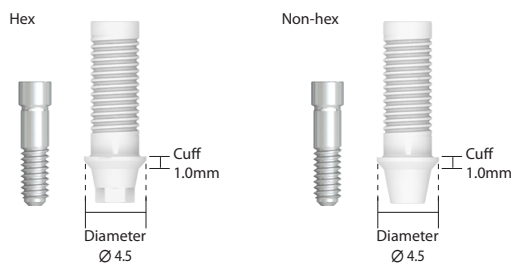


Hex	Non-hex
ISUPH400	ISUPN400

## • Plastic / Diameter $\varnothing 5.2$

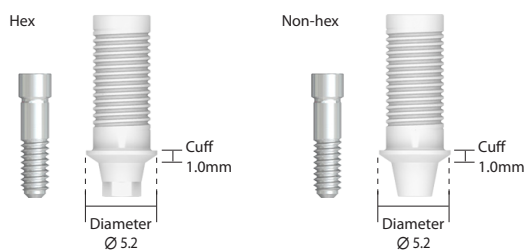

Hex	Non-hex
ISUPH500	ISUPN500





## • Plastic / Diameter $\varnothing 5.7$

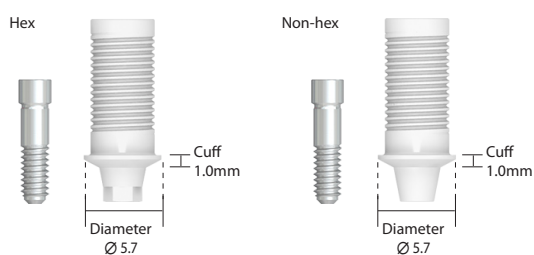

Hex	Non-hex
ISUPH600	ISUPN600

# Components for Abutment Level

## Protective Cap



• Diameter Ø 4.5



Length(mm)	4.5	5.5	7.0
Product name	ISPTC445	ISPTC455	ISPTC470

• Diameter Ø 5.2



Length(mm)	4.5	5.5	7.0
Product name	ISPTC545	ISPTC555	ISPTC570

• Diameter Ø 5.7







Length(mm)	4.5	5.5	7.0
Product name	ISPTC645	ISPTC655	ISPTC670

• Diameter Ø 6.5



Length(mm)	4.5	5.5	7.0
Product name	ISPTC745	ISPTC755	ISPTC770

## Impression Cap



• Diameter Ø 4.5



Product name	ISPIC411
--------------	----------

• Diameter Ø 5.2



Product name	ISPIC511
--------------	----------

• Diameter Ø 5.7



Product name	ISPIC611
--------------	----------





• Diameter Ø 6.5



Product name	ISPIC711
--------------	----------

# Components for Abutment Level

## Lab Analog



### • Diameter Ø 4.5



Length(mm)	4.5	5.5	7.0
Product name	ISLA445	ISLA455	ISLA470

### • Diameter Ø 5.2



Length(mm)	4.5	5.5	7.0
Product name	ISLA545	ISLA555	ISLA570

### • Diameter Ø 5.7





Length(mm)	4.5	5.5	7.0
Product name	ISLA645	ISLA655	ISLA670

### • Diameter Ø 6.5



Length(mm)	4.5	5.5	7.0
Product name	ISLA745	ISLA755	ISLA770

## Plastic Coping



### Hex



Diameter(ø)	4.5	5.2	5.7	6.5
Product name	ISPCH410	ISPCH510	ISPCH610	ISPCH710

### Non-Hex




Diameter(ø)	4.5	5.2	5.7	6.5
Product name	ISPCN410	ISPCN510	ISPCN610	ISPCN710

# Components for Fixture Level

## Pick Up Impression Coping


• Diameter Ø 4.0

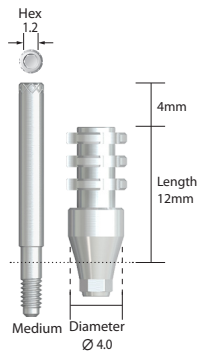

Type	Hex	SCRP	Non-hex
Medium	ISIPH400	ISIPS400	ISIPN400

\* Impression coping Screw included  
(Medium – ISPIS20)


• Diameter Ø 4.5

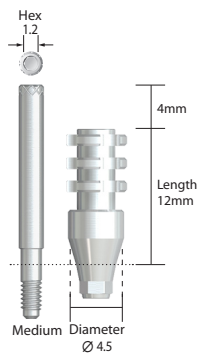

Type	Hex	SCRP	Non-hex
Medium	ISIPH450	ISIPS450	ISIPN450

\* Impression coping Screw included  
(Medium – ISPIS20)

• Diameter Ø 4.8

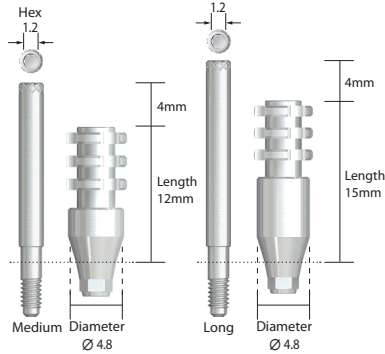



Type	Hex	SCRP	Non-hex
Medium	ISIPH411	ISIPS411	ISIPN411
Long	ISIPHL411	ISIPSL 411	ISIPNL411

\* Impression coping Screw included  
(Medium – ISPIS20, Long – ISPISL20)

# Components for Fixture Level

## Pick Up Impression Coping



### • Diameter Ø 5.5

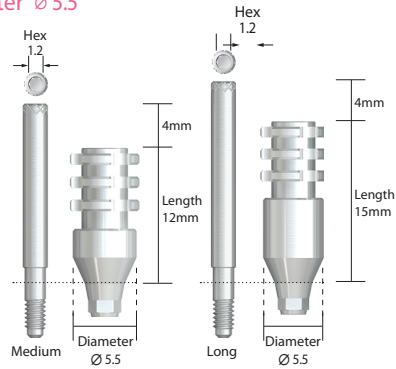

Type	Hex	SCR	Non-hex
Medium	ISIPH511	ISIP511	ISIPN511
Long	ISIPHL511	ISIPSL 511	ISIPNL511

\* Impression coping Screw included  
(Medium - ISIPIS20, Long - ISIPISL20)


### • Diameter Ø 6.0

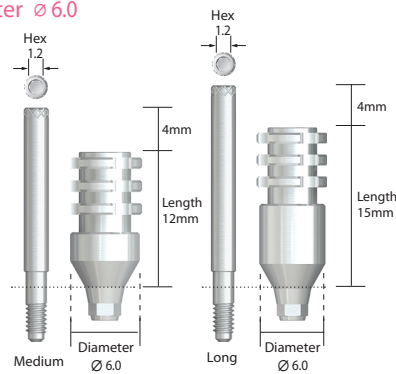

Type	Hex	SCR	Non-hex
Medium	ISIPH611	ISIP611	ISIPN611
Long	ISIPHL611	ISIPSL 611	ISIPNL611

\* Impression coping Screw included  
(Medium - ISIPIS20, Long - ISIPISL20)

### • Impression Coping Screw




X-Long	ISIPIS20L
--------	-----------

# Components for Fixture Level

## Transfer Impression Coping


### • Diameter $\varnothing 4.8$

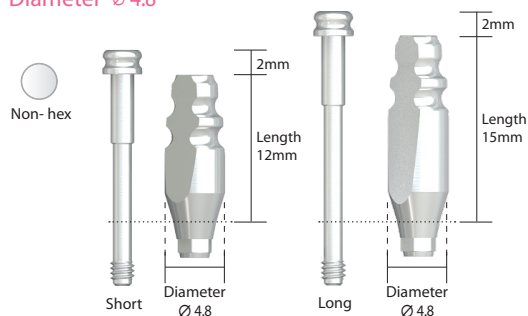

Type	Hex	Non-hex
Short	ISITH411	ISITN411
Long	ISITHL411	ISITNL411

\* Impression coping Screw included  
(Short – ISTIS20, Long – ISTISL20)



### • Diameter $\varnothing 5.5$

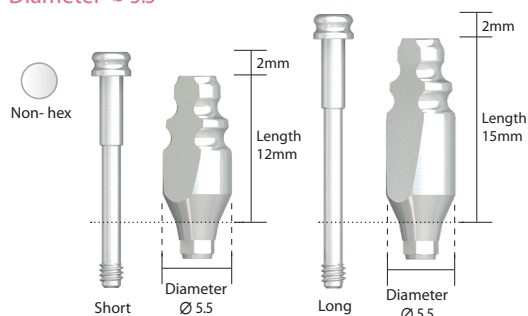

Type	Hex	Non-hex
Short	ISITH511	ISITN511
Long	ISITHL511	ISITNL511

\* Impression coping Screw included  
(Short – ISTIS20, Long – ISTISL20)


### • Diameter $\varnothing 6.0$

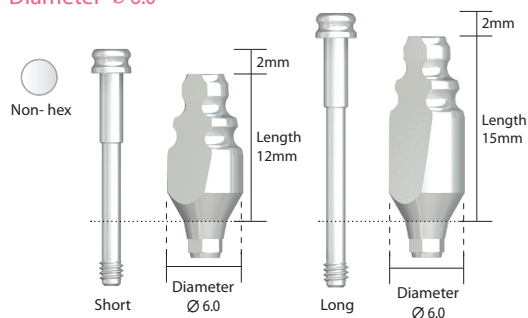

Type	Hex	Non-hex
Short	ISITH611	ISITN611
Long	ISITHL611	ISITNL611

\* Impression coping Screw included  
(Short – ISTIS20, Long – ISTISL20)


### • Impression Coping Hex Screw

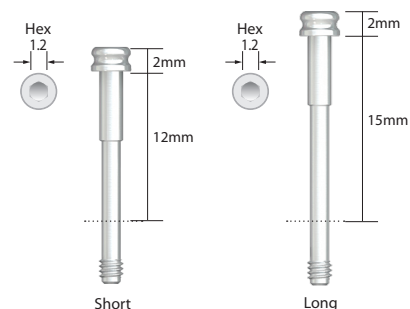

Short	ISTIS20H
Long	ISTISL20H

# Components for Fixture Level

## Transfer Impression Coping Positioner




\* Connected to transfer impression coping




Product name	FDHSET01
--------------	----------

## Lab Analog



Diameter  
Ø 3.8

Diameter  
Ø 4.3



Diameter	3.8	4.3
Product name	ISLA400	ISLA500



\* ISLA400 : Narrow(Ø3.5), All 7.3mm Fixtures  
\* ISLA500 : Regular-wide Fixture



# Multi Unit Abutment

Screw-retained abutment for multiple or bridges

- Abutment Tightening Torque : 30 Ncm, Cylinder screw 15 Ncm

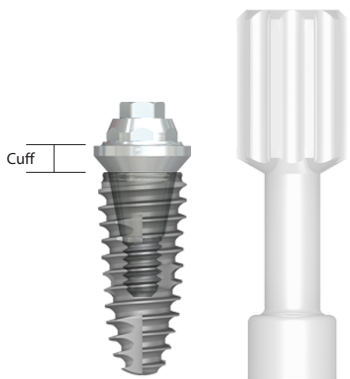


## Multi Unit Abutment



Cuff(mm)	1.5	2.5	3.5	4.0
Product name	ISMUA4810	ISMUA4820	ISMUA4830	ISMUA4840

\* Holder(MUAH48) Included




## CCM Cylinder, Non-hex



Length(mm)	12
Product name	MUACCN48

\* Cylinder Screw(MUAS 14) Included




## Temporary Cylinder, Non-Hex



Length(mm)	11
Product name	MUATPCN48

\* Cylinder Screw(MUAS 14) Included




## Healing Cap



Length(mm)	4.1
Product name	MUAHC48


# Multi Unit Abutment



Pick-up Impression Coping



Length(mm)	9
Product name	MUAIP48



Transfer Impression Coping



Length(mm)	9
Product name	MUAIT48



Lab analog



Product name	MUALA48
--------------	---------



Multi Unit Driver






Product name	MUAD48
--------------	--------

# Ball Abutment

Implant over-denture ball attachment system

- Compensation degree : Max 20° between implants
- Abutment Tightening Torque : 30 Ncm

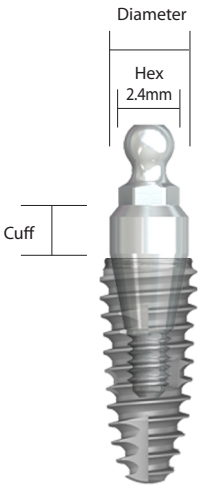

## Ball Abutment



Cuff(mm)	1.0	2.0	3.0	4.0
Product name	ISABA100	ISABA200	ISABA300	ISABA400

\* Ball Abutment Driver(BADH24) Required

## Housing



Product name	BAH40
--------------	-------

\* O-ring(BAORING) 5ea and O-ring(BAOIMP) 1ea Included

## Retainer



Product name	BAR20
--------------	-------

\* In case of occlusion interval is lower, use retainer instead of housing

\* O-ring(BAORING) 5ea and O-ring(BAOIMP) 1ea Included

# Ball Abutment



## O-Ring (Clinical)



Product name	BAORING
--------------	---------

\* 3ea Included



## O-Ring (Lab)



Product name	BAOIMP
--------------	--------

\* 3ea Included

\* Prevents the resin flowing into the under of Housing or Retainer


1. while making a final resin denture at laboratory.
2. while inserting Housing or Retainer within denture directly at the office.



## Ball Lab Analog



Product name	BALA350
--------------	---------

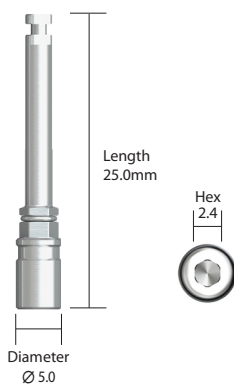

## Ball Abutment Driver



Product name	BADH24
--------------	--------